

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 188 638 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
20.03.2002 Bulletin 2002/12

(51) Int Cl.7: B62D 1/04, B60K 37/06

(21) Application number: 01122291.6

(22) Date of filing: 18.09.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Miyako, Mamoru,
c/o K.K.Tokai Rika Denki Seisakusho
Niwa-gun, Aichi (JP)
• Imai, Keisuke,
c/o K.K.Tokai Rika Denki Seisakusho
Niwa-gun, Aichi (JP)

(30) Priority: 18.09.2000 JP 2000281889


(71) Applicant: Kabushiki Kaisha Tokai Rika Denki
Seisakusho
Niwa-gun, Aichi 480-0195 (JP)

(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Structure for mounting switch on vehicular steering wheel

(57) An outer casing (4) of a switch (3) is provided with mounting hooks (9), which are engaged with a core metal (11) of a steering wheel (1). A lower cover (12) of the steering wheel (1) is provided with retaining portions (13), which are made to abut against the mounting hooks (9) in such a way as to restrain the retaining portions (13) from moving in a direction in which the engagement between the core metal (11) and each of the retaining portions (13) is canceled. Consequently, the switch 3 (is) firmly mounted on the steering wheel (1). Thus, a stable mounting state of the switch (3) is obtained.

FIG. 1

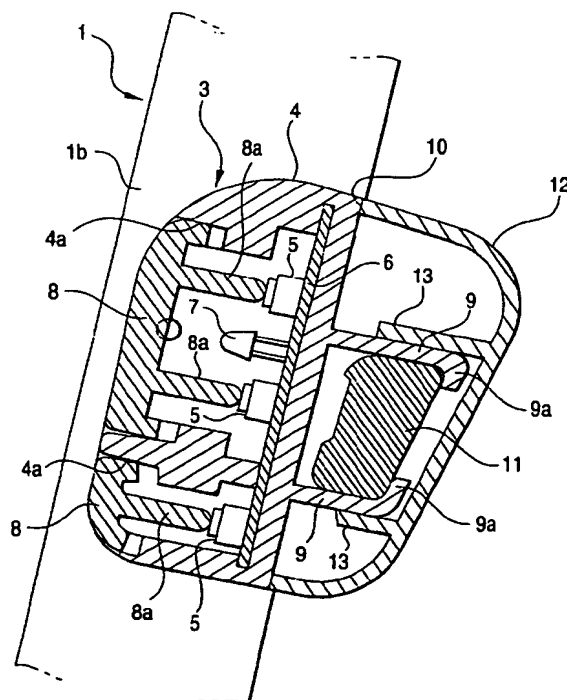

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a steering wheel switch mounting structure for mounting a switch on a steering wheel of a vehicle.

[0002] In recent years, there has been provided a switch mounted on a steering wheel of a vehicle, for example, an automobile. The switch is used for operating, for instance, an audio player or an automatic transmission. The switch is generally mounted to the steering wheel so that a bracket on which the switch is mounted is screwed to the steering wheel, which is one type of the mounting structure. Further, there are another types of the mounting structure, that is, the switch is mounted so that the switch is directly screwed to the steering wheel, or the switch is directly pressed into a part made of a soft material of the steering wheel.

[0003] Among the aforementioned related structures, the mounting structure of the type screwing the bracket on which the switch is mounted to the steering wheel needs the bracket and the screw. Thus, the number of components of the structure of this type is large. Moreover, it takes time to screw the switch to the steering wheel. Consequently, the manufacturing cost thereof increases. Further, although the structure of the type screwing the switch directly to the steering wheel does not need a bracket, however, this structure still needs the screws. Therefore, the manufacturing cost of this structure is still high.

[0004] Furthermore, as compared with these conventional structures, the structure of the type pressing the switch into the part made of the soft material of the steering wheel needs neither the bracket nor the screw. However, since the part made of the soft material supports the mounted switch, this structure has a drawback in that the mounting state of the switch is unstable, namely, the mounted switch is unsteady.

SUMMARY OF THE INVENTION

[0005] The invention is accomplished in view of the aforementioned circumstances. Accordingly, an object of the invention is to provide a structure for mounting a switch on a vehicular steering wheel, which needs neither a bracket nor a screw and obtains a steady and stable mounting state of the switch.

[0006] To achieve the foregoing object, according to the invention, there is provided a structure (hereunder referred to a first structure) for mounting a switch on a vehicular steering wheel. The first structure comprises an outer casing accommodating a switch body of the switch;

a mounting hook provided on the outer casing and engaged with the core metal;
a lower cover covering a back of the steering wheel;

and
a retaining portion provided on the lower cover and being in contact with the mounting hook engaged with the core metal so as to restrain the mounting hook from moving in a direction in which engagement between the core metal and the mounting hook is canceled.

[0007] According to the first structure of the invention, the switch is mounted on the steering wheel without using a bracket and a screw. Moreover, the switch is mounted on a core metal of the steering wheel. Furthermore, the switch is more firmly mounted thereon by utilizing not only the engagement between the core metal and the mounting hook but also the retaining portion serving to restrain the hook portion from moving in a direction in which the engagement therebetween is canceled.

[0008] In this case, preferably, an embodiment (that is, a second structure) of the first structure of the invention is adapted so that the mounting hooks engage with the exterior of the core metal of the steering wheel, and that each of the retaining portions is in contact with the exterior of a corresponding one of the mounting hooks. Further, preferably, another embodiment (that is, a third structure) of the first structure of the invention is adapted so that each of the mounting hooks has a plurality of leg portions and engages with the core metal by being inserted into a hole portion of the core metal of the steering wheel, and that each of the retaining portions is inserted into a space provided among the leg portions of a corresponding one of the mounting hooks and in contact with the inner side surface of each of the leg portions thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is an enlarged longitudinally sectional side view illustrating a first embodiment of the invention, which is taken along line A-A of FIG. 2.

[0010] FIG. 2 is a plan view illustrating a steering wheel.

[0011] FIG. 3 is an exploded perspective view illustrating a primary part of a second embodiment of the invention.

[0012] FIG. 4 is an enlarged sectional view illustrating a switch mounting portion.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

[0013] Hereinafter, a first embodiment of the invention is described with reference to FIGS. 1 and 2.

[0014] Referring first to FIG. 2, there is shown a steering wheel 1 of a vehicle, such as an automobile. This steering wheel 1 has a hub 1a provided at a central portion thereof, and a rim 1b provided in a peripheral portion thereof. Further, the hub 1a and the rim 1b are connect-

ed to each other through a plurality of spokes 1c.

[0015] The hub 1a of the steering wheel 1 is provided with a horn button 2. Further, a switch 3 is mounted in one of the spokes 1c (that is, the spoke shown in a left-side part of FIG. 2). FIG. 1 illustrates the configuration of the switch 3 and a structure for mounting this switch 3 on the steering wheel 1.

[0016] The switch 3 has an outer casing 4 in which switch bodies 5 are accommodated. The switch bodies 5 are, for instance, tact switches. A plurality of the switch bodies 5 are mounted on a wiring board 6. A plurality of light emitter for indicating operation, for example, light emitting diodes 7 are mounted on the wiring board 6 (incidentally, only one of such light emitter is shown in FIG. 1). These components are accommodated and fixed in the outer casing 4.

[0017] Further, the outer casing 4 has opening portions 4a formed in each of parts thereof, which respectively face the switch bodies 5 and the light emitting diodes 7. Operating buttons 8 serving as operating elements are fitted into the opening portions 4a, respectively. Each of the operating buttons 8 has one or more operating rods 8a provided on the back surface (that is, the right side surface, as viewed in FIG. 1) thereof corresponding to the switch bodies 5, respectively. In response to an operation of pushing the operating button 8, the one or more corresponding switch bodies 5 are pushed by the operating rods 8a corresponding to the switch bodies 5. Incidentally, in this case, the switch 3 is used for operating, for instance, an audio player or an automatic transmission. Various operations are performed on the switch 3 by pushing the operating buttons 8.

[0018] The outer casing 4 is made of, for example, plastic. The mounting hooks 9 are mounted in a back side portion, which is at the side opposite to the operating buttons 8, of the outer casing 4 in such a manner as to be integrally formed and project therefrom. Two of the mounting hooks 9 differing in, for instance, length from each other are placed in such a way as to face each other in an upward or downward direction, as viewed in FIG. 1. Each of the mounting hooks 9 has a hook projection 9a provided at the inward side of the tip end thereof.

[0019] On the other hand, a concave portion 10 is formed in the front side portion (that is, the left-side portion, as viewed in FIG. 1) of one of the spokes 1c of the steering wheel 1. The outer casing 4 of the switch 3 is fitted to the concave portion 10. In this fitting state, the mounting hooks 9 are engaged with a core metal 11 of the steering wheel 1 from the front side thereof. The core metal 11 is provided inside all of the hub 1a, the spoke 1c, and the rim 1b of the steering wheel 11, and is made of metal. The mounting hooks 9 are engaged with the exterior of a part of the core metal, which part lies in the spoke 1c and is the back side of the concave portion 10. Therefore, the core metal 11 is sandwiched between the two mounting hooks 9. The hook projections 9a are en-

gaged with the upper and lower corner parts of a more rear portion of the core metal 11.

[0020] Furthermore, a lower cover 12 for covering the back side portion of the switch 3 and the core metal 11 is provided on the steering wheel 1. Further, retaining portions 13 are formed on the inner surface portion of this lower cover 12. The retaining portions 13 are established so that two of the retaining portions differing in, for instance, length from each other are provided in such a way as to face each other in an upward or downward direction, and that the distance between the two retaining portions facing each other is set in such a manner as to be nearly equal to the distance between the outer side surfaces of the two mounting hooks 9 facing each other. When the lower cover 12 is attached to the switch 3 after the mounting hooks 9 are engaged with the core metal 11, each of the retaining portions 13 is made to abut against a corresponding one of the mounting hooks 9, especially, against the outer side surface thereof.

[0021] Consequently, the mounting hooks 9 engaged with the core metal 11 are prevented by the retaining portions 13 from moving in a direction in which the engagement between the core metal 11 and each of the mounting hooks 9 is canceled. Thus, the switch 3 is mounted on the steering wheel 1. Incidentally, the surface portion of the switch 3 mounted thereon is almost flush with that of the steering wheel 1.

[0022] Thus, according to this embodiment, the switch 3 is mounted on the steering wheel 1 by utilizing the mounting hooks 9 provided in the outer casing 4 of the switch 3, and the retaining portions 13 provided on the lower cover 12 of the steering wheel 1. This embodiment does not need the bracket and the screw, which are needed in the related structure. Consequently, the manufacturing cost thereof is reduced.

[0023] Further, according to the first embodiment of this configuration, a component on which the switch 3 is mounted is the core metal 11 of the steering wheel 1. Thus, this embodiment does not cause the unsteadiness of the switch, which occurs owing to the softness of the soft material in the related structure adapted to press the switch into the soft material of the steering wheel. Moreover, in addition to engaging of the mounting hooks 9 with the core metal 11, the retaining portions 13 restrain the mounting hooks 9 from moving in the direction in which the engagement between the core metal 11 and each of the mounting hooks 9 is canceled. Consequently, the switch is more firmly mounted onto the steering wheel 1. Furthermore, a stable mounting state of the switch is obtained.

[0024] FIGS. 3 and 4 illustrate a second embodiment of the invention for comparison with the first embodiment described hereinabove. In these figures, components of the second embodiment, which are the same as those of the first embodiment, are designated by the same reference character. Thus, the description of such components is omitted herein. Further, only the differences between the first and second embodiments are

described hereinafter.

[0025] In the case of the second embodiment, two pairs, that is, upper and lower pairs of mounting hooks 21 are provided on the back side of an outer casing 4 of a switch 3 in such a way as to project therefrom. Each of these mounting hooks 21 has a plurality of leg portions 21a (incidentally, two leg portions 21a in this case). A hook projection 21b is provided on the outer side of the tip end part of each of the leg portions 21a. On the other hand, in a concave portion 10 of one of spokes 1c of the steering wheel 1, a core metal 11 is exposed therefrom. As shown in FIG. 4, hole portions 23 and 24 are formed correspondingly to each of the mounting hooks 21 of the switch 3 in such a manner as to be aligned with each other and as to penetrate the soft material 22 and the core metal 11.

[0026] Furthermore, a retaining portion 25 is formed like a plate and is provided on the inner surface of the lower cover 12 correspondingly to each of the mounting hooks 21 of the switch 3 in such a way as to extend in a direction perpendicular to the corresponding mounting hook 21 and as to be tapered toward the tip end thereof.

[0027] Thus, in the case of the second embodiment, each of the mounting hooks 21 is inserted into the hole portions 23 and 24 from the front side of the switch 3 (that is, from above, as viewed in these figures), and then the hook projection 21b thereof is engaged with a back side peripheral part of the hole portion 24. Further, when the lower cover 12 is attached to the switch 3 in this state, each of the retaining portions 25 is inserted into a space provided between the leg portions 21a of a corresponding one of the mounting hooks 21 from the back side of the switch 3 (that is, from below in these figures). Thus, each of the retaining portions 25 comes in contact with the inner side surface of each of the leg portions 21a of the corresponding mounting hook 21 and restrains the corresponding mounting hook 21 engaged with the core metal 11 from moving in a direction in which the engagement between this mounting hook 21 and the core metal 11 is canceled. Consequently, this embodiment prevents the mounting hooks 21 from disengaging from the core metal 11, and serves to mount the switch 3 on the steering wheel 1.

[0028] According to the second embodiment, the switch 3 is mounted on the steering wheel 1 without using the bracket and the screw, which are needed in the related structure. Moreover, a component on which the switch 3 is mounted is the core metal 11 of the steering wheel 1. Moreover, in addition to engaging of the mounting hooks 21 with the core metal 11, the retaining portions 25 restrain the mounting hooks 21 from moving in the direction in which the engagement between the core metal 11 and each of the mounting hooks 21 is canceled. Consequently, the switch is more firmly mounted onto the steering wheel 1. Furthermore, a stable mounting state of the switch is obtained.

[0029] Incidentally, the first embodiment does not need to form holes in the core metal 11 of the steering

wheel 1 as in the second embodiment. Therefore, the first embodiment has advantages over the second embodiment in maintaining the strength of the core metal 11, thus, the strength of the steering wheel 1 at a high level.

[0030] In the above description, the plurality of the mounting hooks is utilized for the engagement with the core metal. The present invention is not restricted thereto or thereby. For example, the single mounting hook may be utilized for the engagement with the core metal.

[0031] As is apparent from the foregoing description, the structure for mounting a switch on a vehicular steering wheel according to the invention has excellent advantageous effects in that neither a bracket nor a screw is needed for mounting the switch to the steering wheel, and that a steady and stable mounting state is obtained.

Claims

1. A structure for mounting a switch on a steering wheel including a core metal therein of a vehicle, the structure comprising:
 - an outer casing accommodating a switch body of the switch;
 - a mounting hook provided on the outer casing and engaged with the core metal;
 - a lower cover covering a back of the steering wheel; and
 - a retaining portion provided on the lower cover and being in contact with the mounting hook engaged with the core metal so as to restrain the mounting hook from moving in a direction in which engagement between the core metal and the mounting hook is canceled.
2. The structure according to claim 1, wherein the mounting hook engages with an exterior of the core metal, and the retaining portion is in contact with an exterior of the mounting hook.
3. The structure according to claim 2, wherein a pair of the mounting hooks is provided on the outer casing, a pair of the retaining portions is provided on the lower cover, the core metal is sandwiched between the pair of the mounting hooks, and the pair of the retaining portions are in contact with exterior of the pair of the mounting hooks, respectively.
4. The structure according to claim 2, wherein a tip end of the mounting hook is provided with a hook projection extending so as to be engaged with a rear portion of the core metal.
5. The structure according to claim 1, wherein the mounting hook has a plurality of leg portions and is

inserted into and engaged with a hole portion of the core metal, and the retaining portion is inserted into a space provided among the leg portions and in contact with an inner side surface of each of the leg portions.

5

10

15

20

25

30

35

40

45

50

55

5

FIG. 1

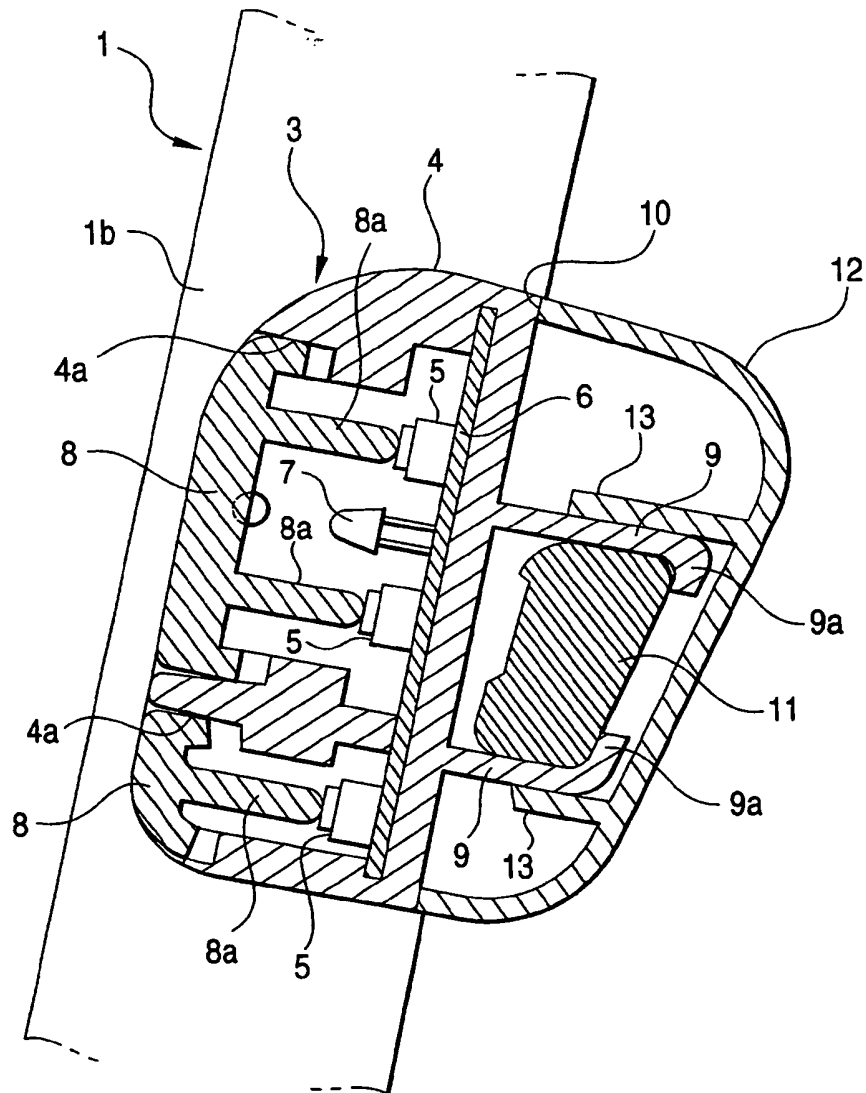


FIG. 2

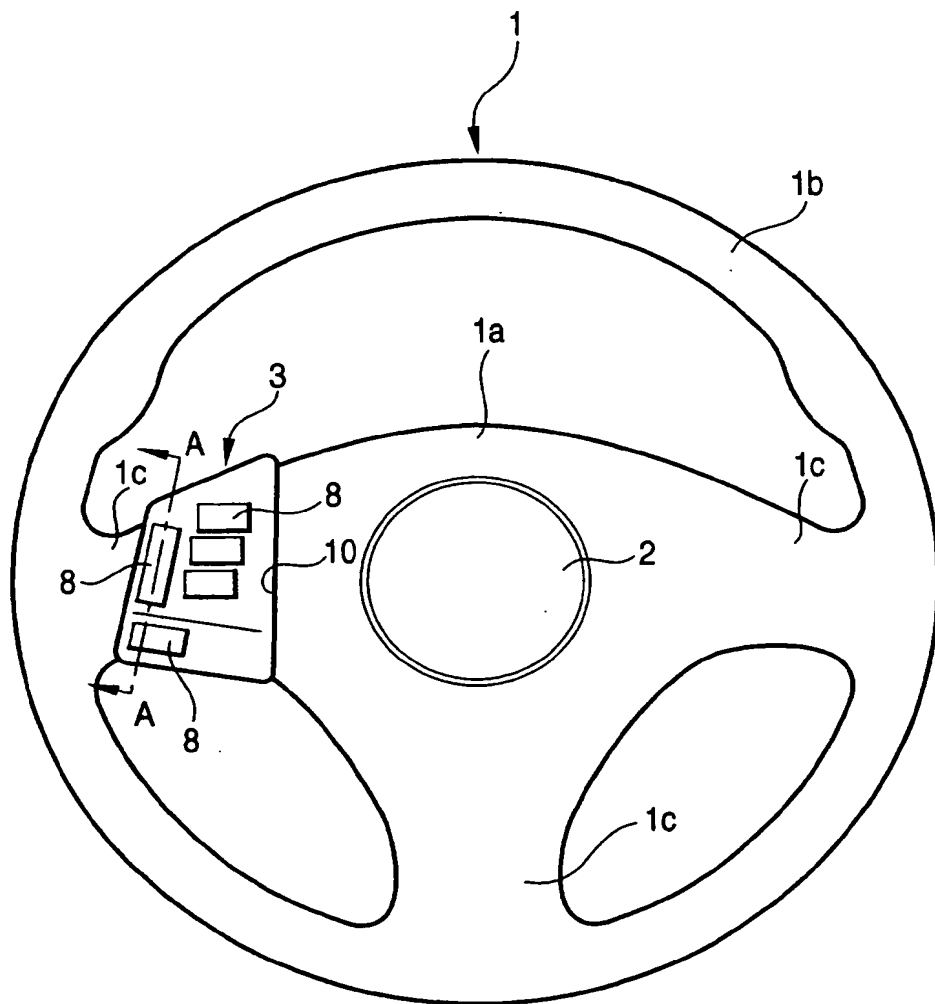


FIG. 3


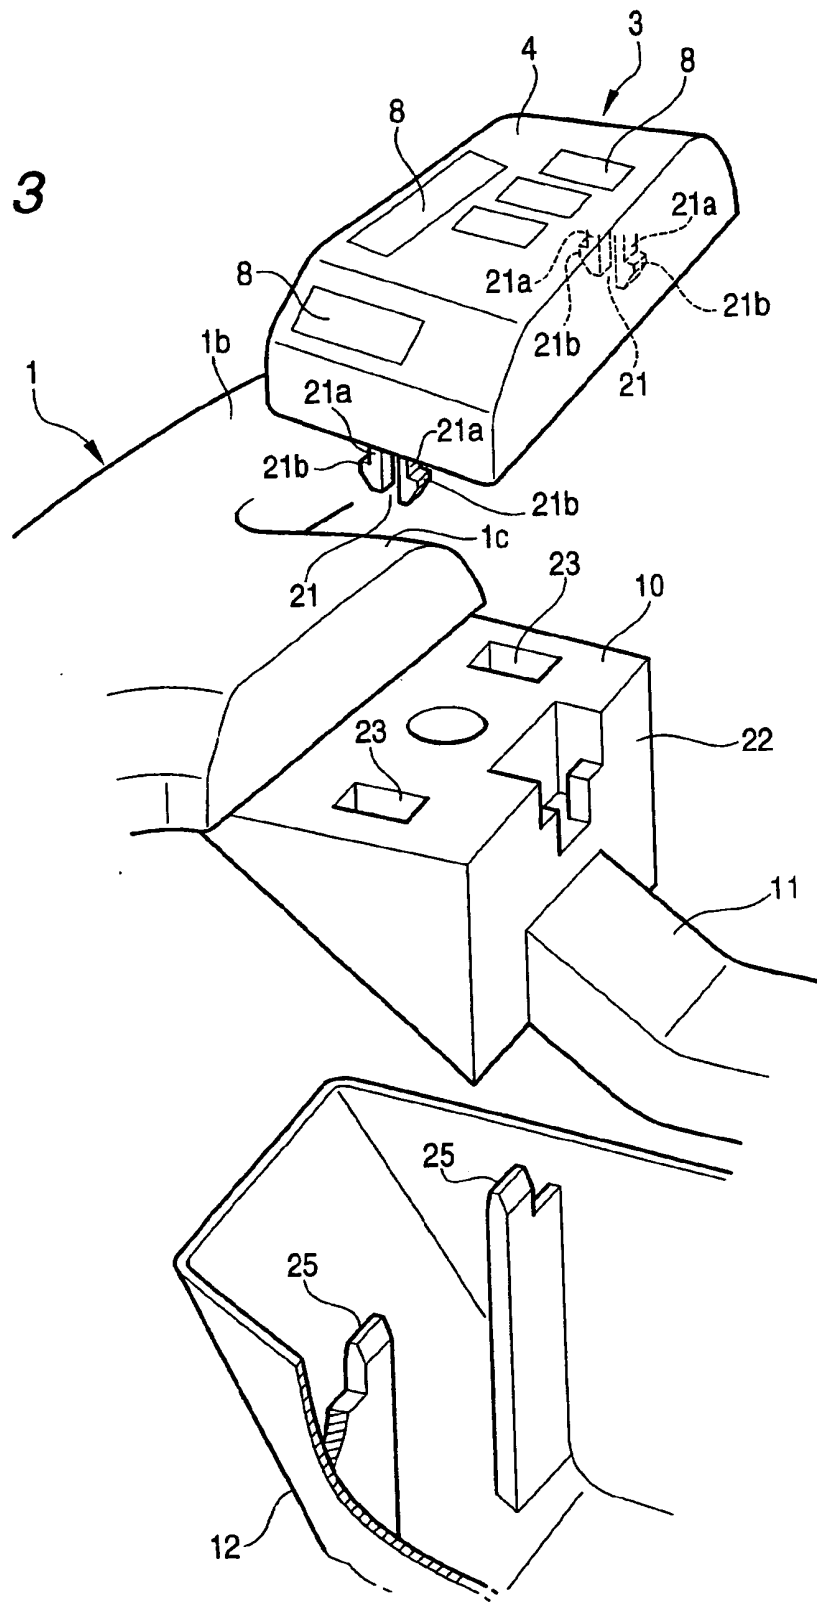


FIG. 4



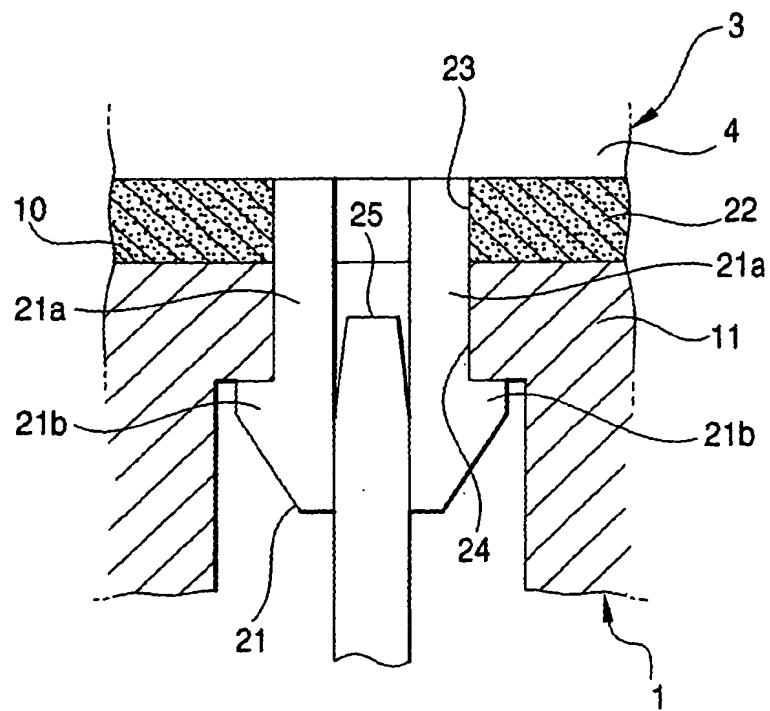

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2291

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	DE 41 40 275 A (VOLKSWAGEN) 25 June 1992 (1992-06-25) * abstract; figure 2 *	1	B62D1/04 B60K37/06
A	DE 299 17 214 U (TRW) 17 February 2000 (2000-02-17)		
A	EP 0 635 388 A (PORSCHE) 25 January 1995 (1995-01-25)		
A	US 5 350 190 A (SZIGETHY) 27 September 1994 (1994-09-27)		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B62D B60K B60Q B60R F16H
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 28 November 2001	Examiner Krieger, P
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP FORM 1503 03/02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 2291

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-11-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 4140275	A	25-06-1992	DE	4140275 A1	25-06-1992
DE 29917214	U	17-02-2000	DE	29917214 U1	17-02-2000
			EP	1088737 A2	04-04-2001
EP 635388	A	25-01-1995	DE	4324788 A1	02-02-1995
			DE	4407429 A1	14-09-1995
			DE	59401639 D1	06-03-1997
			EP	0635388 A1	25-01-1995
			JP	7144554 A	06-06-1995
			US	5520066 A	28-05-1996
US 5350190	A	27-09-1994	CA	2127049 A1	07-01-1995

EPO FORM P0453

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)